

For Retrofits

Ensure the BarTrack
BCM is plugged in





Plug in the Ethernet cable into the BCM



3.

Ensure the BarTrack
BCM is plugged in. Wait
until you see a solid
green light & a solid
orange light illuminated
before beginning the
set up process.




4. Scan QR Code



5.

Open Terms & Conditions

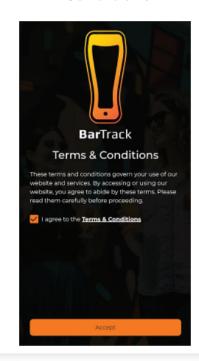



6


Accept Terms & Conditions





Retrofits | Rev. 0

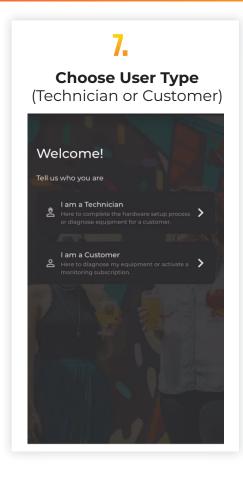


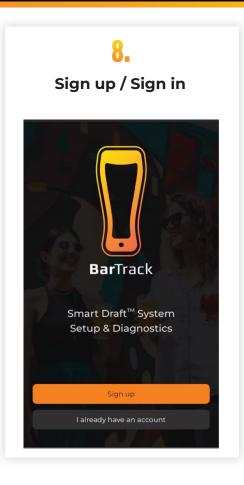

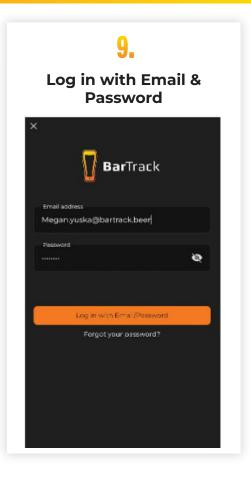


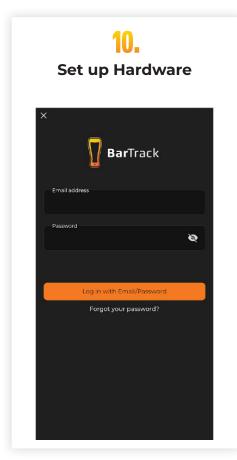


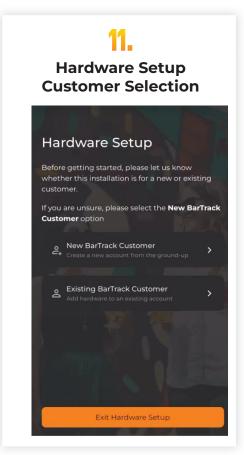


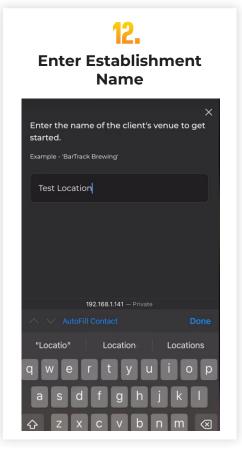



Retrofits | Rev. 0

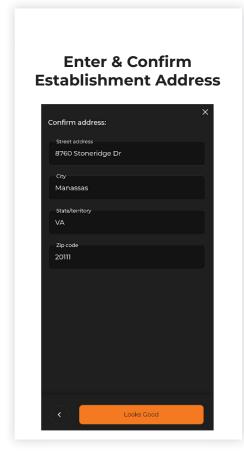


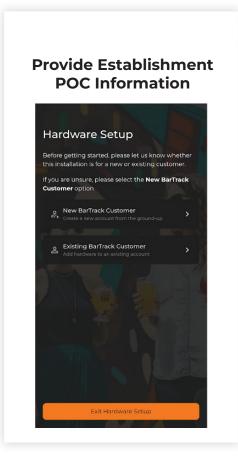

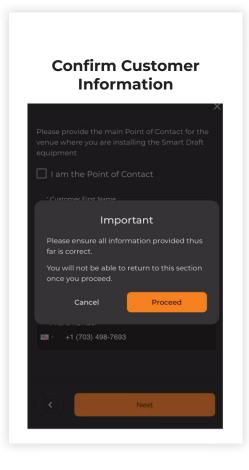


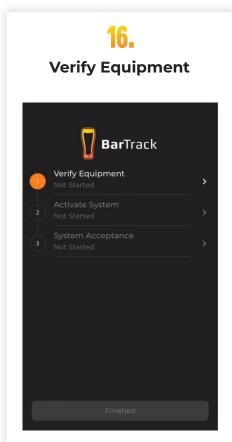


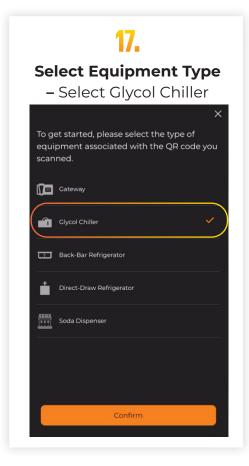


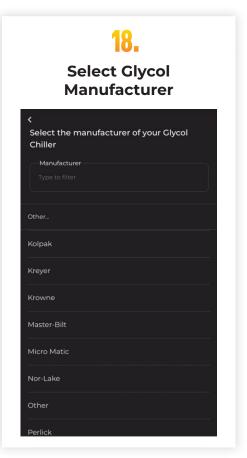



Retrofits | Rev. 0

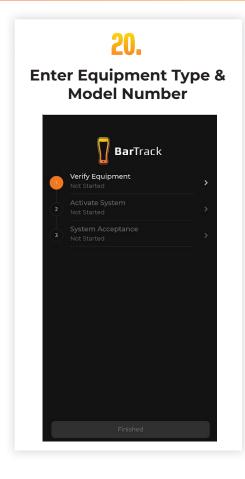


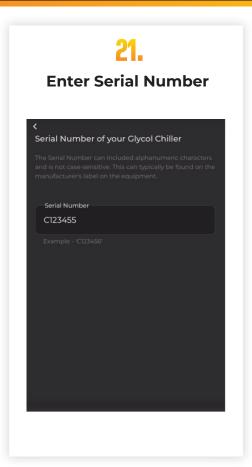

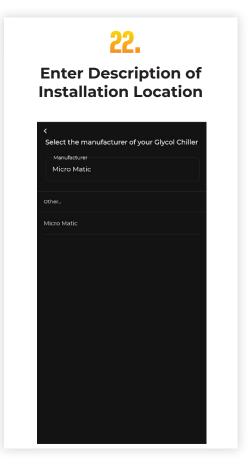


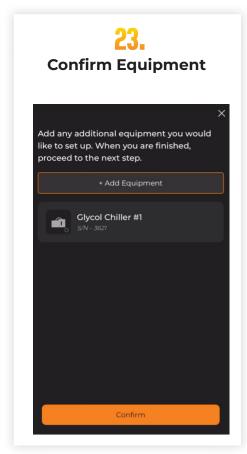


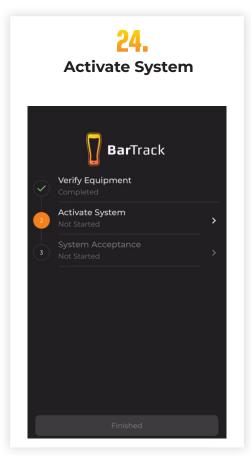


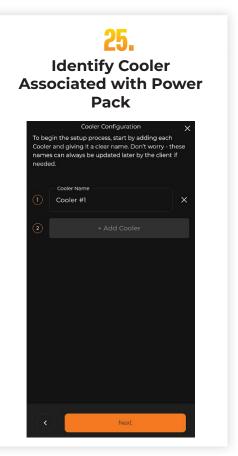

Retrofits | Rev. 0 4.

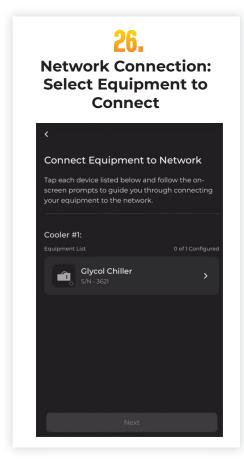

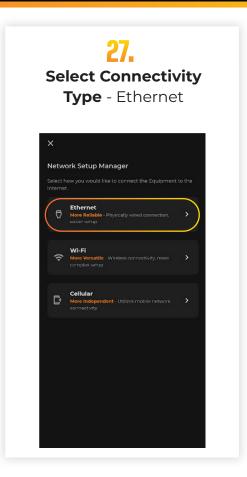

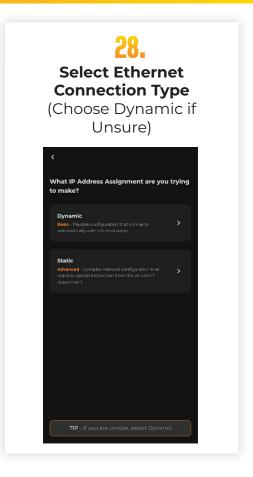

Ensure Successful Connection. Close this tab & Return to First Setup tab.

*

Dynamic Ethernet Connection

Be sure to review the information below before proceeding to the next step in the setup process

Ethernet Setup


Route the ethernet cable from the venue's network equipment


Ensure the ethernet cable is plugged into the venue's network equipment

Plug the ethernet cable into the port on the lefthand side of the device, near the power plug


Verify that proper cable management Best Practices have been adhered to


Click Check Device Connectivity to continue setup

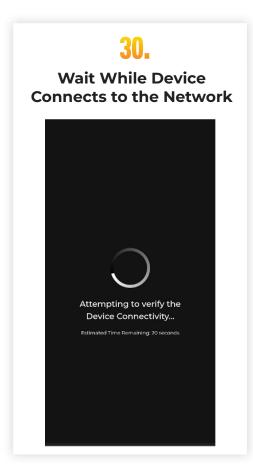


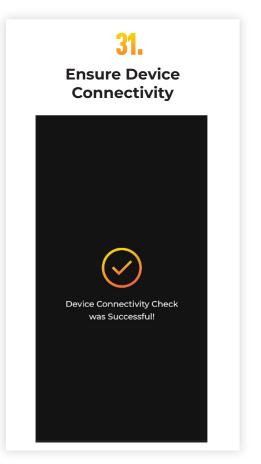


Retrofits | Rev. 0 5.

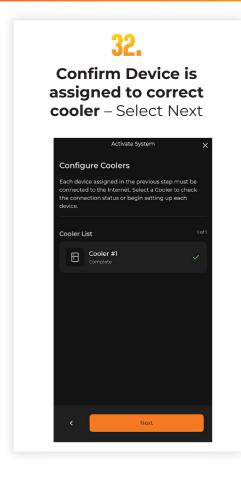

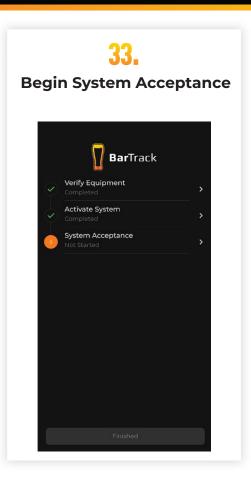

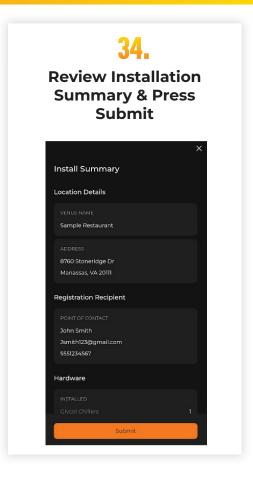

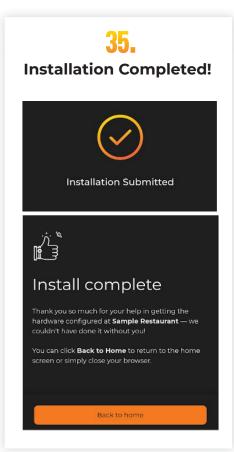

Retrofits | Rev. 0 6.